


RESIDENTIAL RANGE

RESISTANT AGAINST PHYSICAL ATTACK WHERE LIGHT TOOLS ARE USED

PROFILE	Mild Steel. 76mm Door leaf (1.6mm). 110mm Bend L-Shape Frame (1.6mm).
COLOUR	Standard door is primed and ready for painting after installations.
MATERIAL	1.6mm Mild steel. Medium Density Fiber Board (MDF) for internal use and Birch ply wood for external use. Rock Wool.
LOCKS	ISEO 675 GF Multi Point locking system
CYLINDER	ISEO
HINGES	2 Hinge system unless more required due to the size of the structure
INSULATION SEALS	1 Unit

Purpose made door designed for commercial or residential properties with low to medium risk of burglaries. The door structure is lightweight with heavy duty hinges designed for durability. Doorframe and its leaf is sound and thermally insulated. The door can be custom size, double, with side or top sections (skylight), or with any size glazing options. This door range is an excellent alternative to wooden or aluminum doors for clients wanting increased durability, security as well as insulation.

Optional EXTRAS: Peep-hole

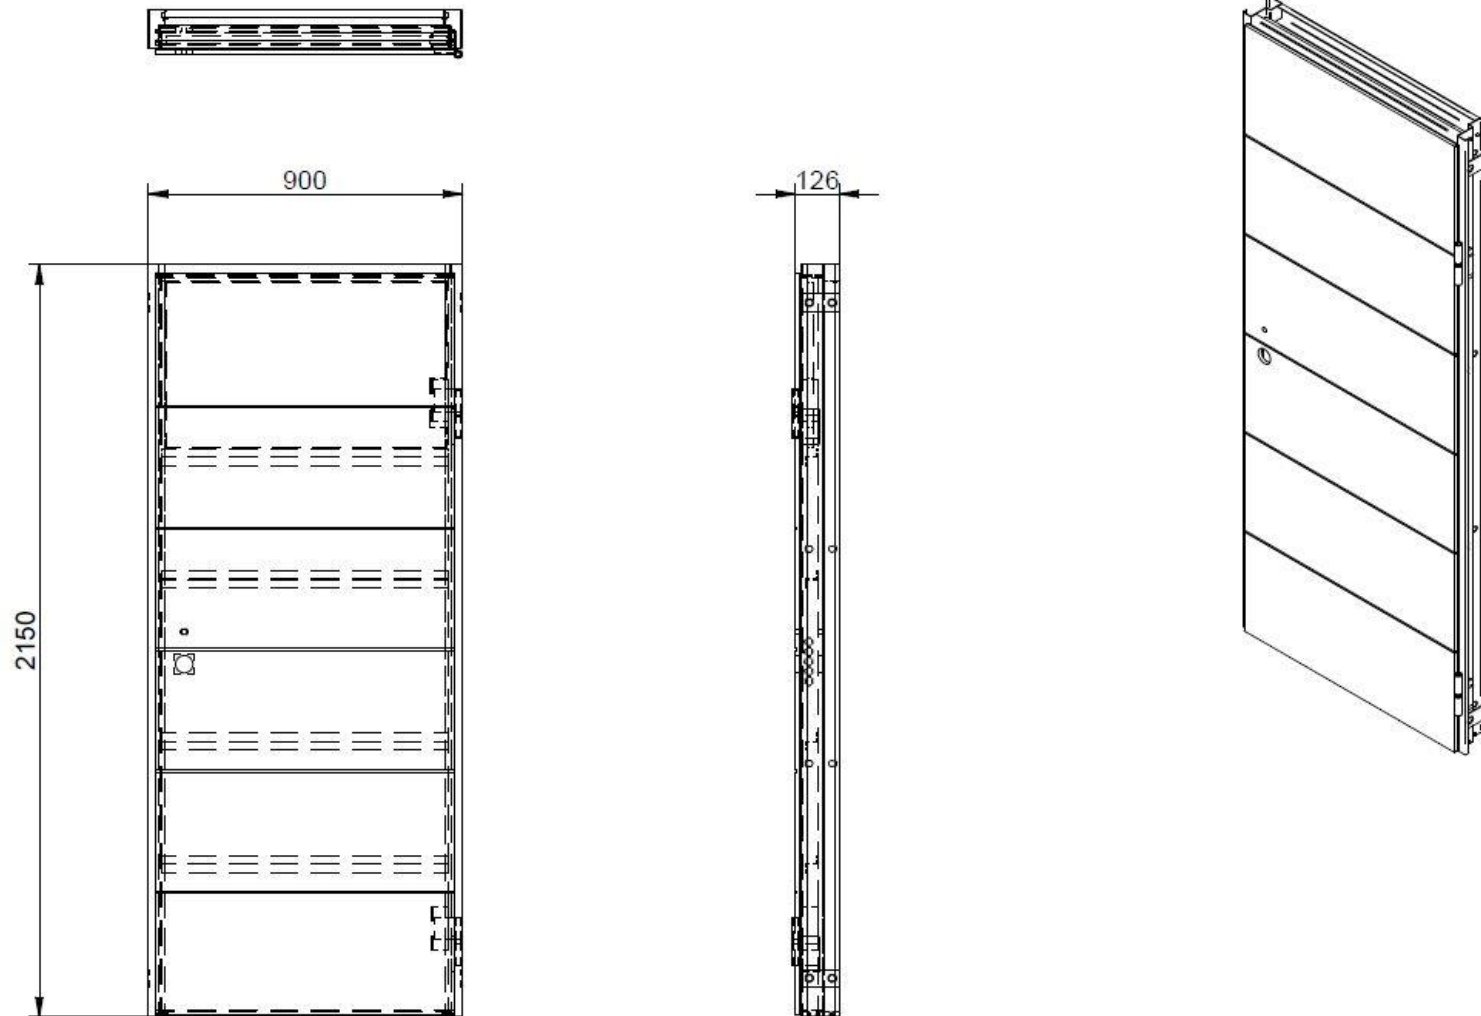

SBD Door Pty Ltd,
Registration no.: 2022/6694/21
Address: Portion 179 of farm Nooitgedacht, River Road, Nietgedacht 535-JQ, Roodepoort, South Africa
e-mail info@securitydoors.africa, [www: www.securitydoors.africa](http://www.securitydoors.africa)